ONTARIO S1P SRC

DESCRIERE	NORMA EN ISO 20345:2011	REZULTAT	CERINTE NORMA
Fete: : Şpalt de bovină, material textil perforat Verusso şi ornament reflectorizant	5.4.3 Rezistenta la sfasiere 5.4.6 Coeficient de Permeabilitatea la vapori de apa	211 N 3.3 mg/cm^{2}h 35.5 mg/cm^2	≥60 N ≥ 0,8 mg/cm^{2}h ≥ 15,0 mg/cm^2
Captuseala caputa : Material textil, rezistent la abraziune, asigură aerisirea piciorului	5.5.1 Rezistenta la sfasiere 5.5.2 Rezistenta la abraziune (mediu umed) Rezistenta la abraziune (mediu uscat) 5.5.3 Coeficient de Permeabilitatea la vapori de apa	25 N Fara decupaj Fara decupaj 7.7 mg/cm^2 62 mg/cm^2	≥ 15 N 25.600 cicluri 12.800 cicluri ≥ 2,0 mg/cm^2 ≥ 20,0 mg/cm2
Captuseala staif: Membrană respirabilă,rezistenta la abraziune	5.5.1 Rezistenta la sfasiere 5.5.2Rezistenta la abraziune (mediu umed) Rezistenta la abraziune (mediu uscat) 5.5.3 Coeficient de Permeabilitatea la vapori de apa	25N Fara decupaj Fara decupaj 7.5 mg/cm^2 62 mg/cm^2	≥ 15 N 51.200 cicluri 25.600 cicluri ≥ 2,0 mg/cm^2 ≥ 20,0 mg/cm2
Bombeu de siguranta: Material compozit nemetalic	5.3.2.3 Rezistenta la impact 5.3.2.4 Rezistenta la compresiune	14 mm 15.5 mm	≥ 14 mm ≥ 14 mm
Lamela antiperforare: Lamelă antiperforaţie nemetalică, perforaţie zero	5.7.1 Grosime 5.7.3 Absorbtia de apa	3.5 mm 72 mg/cm^2	≥ 2,0 mm ≥70,0 mg/cm^2

Acoperis de brant: Talpa interioara detasabila, captusita, antistatica	5.7.4.2 Rezistenta la abraziune (mediu umed) Rezistenta la abraziune (mediu uscat)	Fara perforatii Fara perforatii	25.600 cicluri 12.800 cicluri
Talpa: PU 1D talpa aderenta, SRC	5.8.2 Rezistenta la sfasiere 5.8.3 Rezistenta la abraziune 5.8.4 Rezistenta la flexare 5.8.5.Hidroliză 6.4.2 Rezistenta la uleiuri 5.11 Rezistenta la alunecare pe placi ceramice spalate cu detergent Alunecare pe suprafata totala a talpii Alunecare pe calcai Rezistenta la alunecare pe placi din otel acoperite cu glicerina Alunecare pe suprafata totala a talpii Alunecare pe calcai	10.5 kN/m 58 mm^3 2.5 mm 1.5 mm 1% 0.5 0,44 0,21 0,16	≥ 8 kN/m ≤ 150mm^3 ≤ 4,0 mm ≤ 6,0 mm ≤ 12% ≥ 0,32 ≥ 0,28 ≥ 0,18 ≥ 0,13

MARIMI : 35.-48 MONDOPOINT 11

EXENA S.r.l.
Via Breda, 7/A – Zona Ind.le A 62012 – CIVITANOVA MARCHE (MC) ITALY - Telefono: +39 0733 897256 - Fax: +39 0733 897519 C.F. e P. IVA: 01336080435 – Reg.Imprese MC n.01336080435 – REA MC144207 www.exena.it – info@exena.it - pec: amministrazione@pec.exena.it

---

ONTARIO S1P SRC

DESCRIPTION	NORMA EN ISO 20345:2011	RESULT	REQUIREMENT
UPPER: Suede leather, breathable textile	5.4.3 Tear strength	211 N	≥ 60N
	5.4.6 Water vapor permeability	3,3 mg/cm²h	≥ 0,8 mg/cm²h
	Coefficient	35,5 mg/cm²	≥ 15,0 mg/cm²
VAMP LINING: Breathable, abrasion resistance.	5.5.1 Tear strength	25 N	≥ 15 N
	5.5.2 Abrasion resistance(Wet)	No holes	25.600 cycles
	Abrasion resistance(Dry)	No holes	12.800 cycles
	5.5.3 Water vapor permeability	7,7 mg/cm²h	≥ 2,0 mg/cm²
	Coefficient	62,0 mg/cm²	≥20,0 mg/cm²
QUARTER LINING: Breathable, abrasion resistance.	5.5.1 Tear strength	25 N	≥ 15 N
	5.5.2 Abrasion resistance(Wet)	No holes	51.200 cycles
	Abrasion resistance(Dry)	No holes	25.600 cycles
	5.5.3 Water vapor permeability	7,7 mg/cm²h	≥ 2,0 mg/cm²
	Coefficient	62,0 mg/cm²	≥20,0 mg/cm²
SAFETY TOE CAP: Non-metallic polycarbonate safety toe.	5.3.2.3 Impact resistance	14,0 mm	≥ 14 mm
	5.3.2.4 Compression resistance	15,5 mm	≥ 14 mm
PIERCE-RESISTANCE: Textile pierce proof footbed,	5.7.1. Thickness	3,5 mm	≥ 2,0 mm
	5.7.3 Water absorption	72 mg/cm²	≥70,0 mg/cm²
FOOTBED: Removable, cushioned, antistatic insole.	5.7.4.2 Abrasion resistance(Wet)	No holes	25.600 cycles
	Abrasion resistance(Dry)	No holes	12.800 cycles
OUTSOLE: PU 2D, Antislip sole, TPU insert, SRC	5.8.2 Tear strength	10,5 kN/m	≥ 8 kN/m
	5.8.3 Abrasion resistance	58 mm³	≤ 150 mm³
	5.8.4 Flexing resistance	2,5 mm	≤ 4,0 mm
	5.8.5 Hydrolysis	1,5 mm	≤ 6,0 mm
	6.4.2 Oils resistance	1%	≤ 12%
	5.11 Pressed ceramic tile floor on detergent resistance		
	Flat slip	0,50	≥ 0,32
	Heel slip	0,44	≥ 0,28
	Stainless steel plate on glycerin resistance		
	Flat slip	0,21	≥ 0,18
	Heel slip	0,16	≥ 0,13

MISURE : 35-48

EXENA S.r.l.
Via Breda, 7/A – Zona Ind.le A 62012 – CIVITANOVA MARCHE (MC) ITALY - Telefono: +39 0733 897256 - Fax: +39 0733 897519
C.F. e P. IVA: 01336080435 – Reg.Imprese MC n.01336080435 – REA MC144207
www.exena.it – info@exena.it - pec: amministrazione@pec.exena.it

---

Traducere din limba engleza - in conformitate cu documentul

EXENA
DECLARATIE DE CONFORMITATE UE
M22 –Vers. 00

Conform cu cerințele esențiale stabilite în anexa II Regulamentul (UE) 2016/425, **Exena srl** DECLARA ca echipamentul individual de protectie descris mai jos:

Articol: **ONTARIO S1P SRC**

Standard: EN ISO 20345:2011
Clasa: II
Categoria de marcaj: S1P SRC
Nr. certifcat: F-161-21366-14
Data: 09.08.2018
Civitanova Marche,
Aplicata parafa firmei EXENA S.R.L.
Sediul in Via Breda, 7/A
Civitanova Marche (MC), ITALIA ,
Semnatura ilizibila

Sfârşitul traducerii

EC DECLARATION OF CONFORMITY

The Manufacturer

EXENA SRL

Declares that the new PPE described hereafter.

ONTARIO S1P SRC

Is in the conformity with the previsions of council directive 89/686/EEC and it is identical to the PPE which is the subject of EC CERTIFICATE OF CONFORMITY n 0161/21366/14 issued by

CIMAC
C.so Brodolini, 19
27029 VIGEVANO (PV)
ITALY

And it is submitted to the proceedings established by the directive 89/686/EEC, article n. 11, point A), under the control of the notified organism.

Civitanova Marche lì 09/08/2018
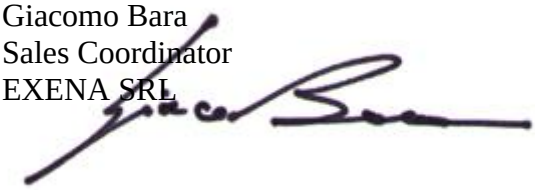
Giacomo Bara
Sales Coordinator
EXENA SRL