


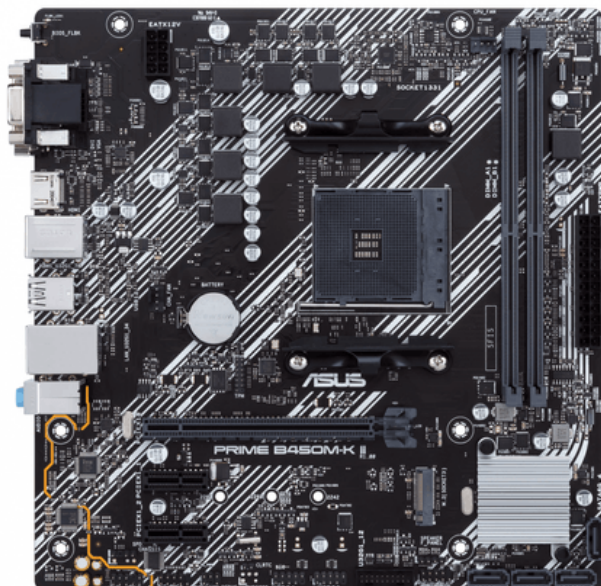

MB ASUS AMD PRIME B450M-K II

Pret: 389³⁹ RON (fara TVA)

Disponibilitate: Comanda speciala

Descriere

Placa de baza Asus AM4, PRIME B450M-K II CPU AMD AM4 Socket for 3rd/2nd/1st Gen AMD Ryzen™/2nd and 1st Gen AMD Ryzen™ with Radeon™ Vega Graphics/Athlon™ with Radeon™ Vega Graphics Processors * * Refer to www.asus.com for CPU support list Chipset AMD B450 Memory 3rd/2nd/1st Gen AMD Ryzen™/ 2nd and 1st Gen AMD Ryzen™ with Radeon™ Vega Graphics/ Athlon™ with Radeon™ Vega Graphics Processors 2 x DIMM, Max. 64GB, DDR4 4400(O.C.)/4000(O.C.)/3866(O.C.)/3733 (O.C.)/3600(O.C.)/3466(O.C.)/3400(O.C.)/3300(O.C.)/3200(O.C.)/3000 (O.C.)/2933(O.C.)/2800(O.C.)/2666/2400/2133 MHz Un-buffered Memory * Dual Channel Memory Architecture ECC Memory (ECC mode) support varies by CPU. * Refer to www.asus.com for the Memory QVL (Qualified Vendors Lists). * The maximum memory frequency supported varies by processor. Graphic Integrated Graphics in the 2nd and 1st Gen AMD Ryzen™ with Radeon™ Vega Graphics/ Athlon™ with Radeon™ Vega Graphics Processors * 1 x D-Sub 1 x DVI-D 1 x HDMI 2.0b *Graphics specifications may vary between CPU types. Expansion Slots 3rd/2nd/1st Gen AMD Ryzen™ Processors 1 x PCIe 3.0 x16 (x16 mode) 2nd and 1st Gen AMD Ryzen™ with Radeon™ Vega Graphics Processors 1 x PCIe 3.0 x16 (x8 mode) AMD Athlon™ with Radeon™ Vega Graphics Processors 1 x PCIe 3.0 x16 (x4 mode) AMD B450 chipset 2 x PCIe 2.0 x1 Storage Total supports 1 x M.2 slot(s) and 4 x SATA 6Gb/s ports 3rd/2nd/1st Gen AMD Ryzen™/ 2nd and 1st Gen AMD Ryzen™ with Radeon™ Vega Graphics : 1 x M.2 Socket 3, with M key, type 2242/2260/2280 storage devices support (SATA & PCIE 3.0 x 4 mode) Athlon™ with Radeon™ Vega Graphics Processors : 1 x M.2 Socket 3, with M key, type 2242/2260/2280 storage devices support (SATA mode) AMD B450 chipset : 4 x SATA 6Gb/s port(s), Support Raid 0, 1, 10 LAN Realtek® RTL8111H ASUS LANGuard Audio Realtek 7.1-Channel High Definition Audio CODEC * - Supports : Jack-detection, Multi-streaming, Front Panel Jack- retasking, up to 24-Bit/192kHz playback Audio Feature : - LED-illuminated design - Audio Shielding - Dedicated audio PCB layers - Premium Japanese audio capacitors <https://www.asus.com/Motherboards/PRIME-B450M-K-II/specifications/>